


No. Proj	
Kepentingan Projek	
Tajuk Projek:	PERMOHONAN PELAN KERJA TANAH BAGI TUJUAN PEMBANGUNAN BERAMPUR DAN PERDAGANGAN DENGAN NISBAH PLOT 5/1, DI ATAS TANAH KERAJAN TEBUSUNA JELUTONG (TAPAK PELUPUSAN SAMPAH SEDIA ADA), SEKSYEN 8, BANDAR GEORGETOWN, PULAU PINANG UNTUK TETUAN PLB ENGINEERING BERHAD


STAGE 1

- EXISTING DUMPSITE SHALL BE EXCAVATED TO THE PLATFORM LEVEL +3.35m NGVD.
- EXCAVATION AT EXISTING DUMPSITE AREA TO BE CARRIED OUT BY EXCAVATION LAYER BY LAYER. EACH LAYER BEING 2m HEIGHT TO THE PLATFORM LEVEL OF +3.35m NGVD.
- DETAILS FOR EXCAVATION REFER TO APPENDIX F (EARTHWORK AND EROSION & SEDIMENT CONTROL (ESCP) REPORT, SECTION 5.0)

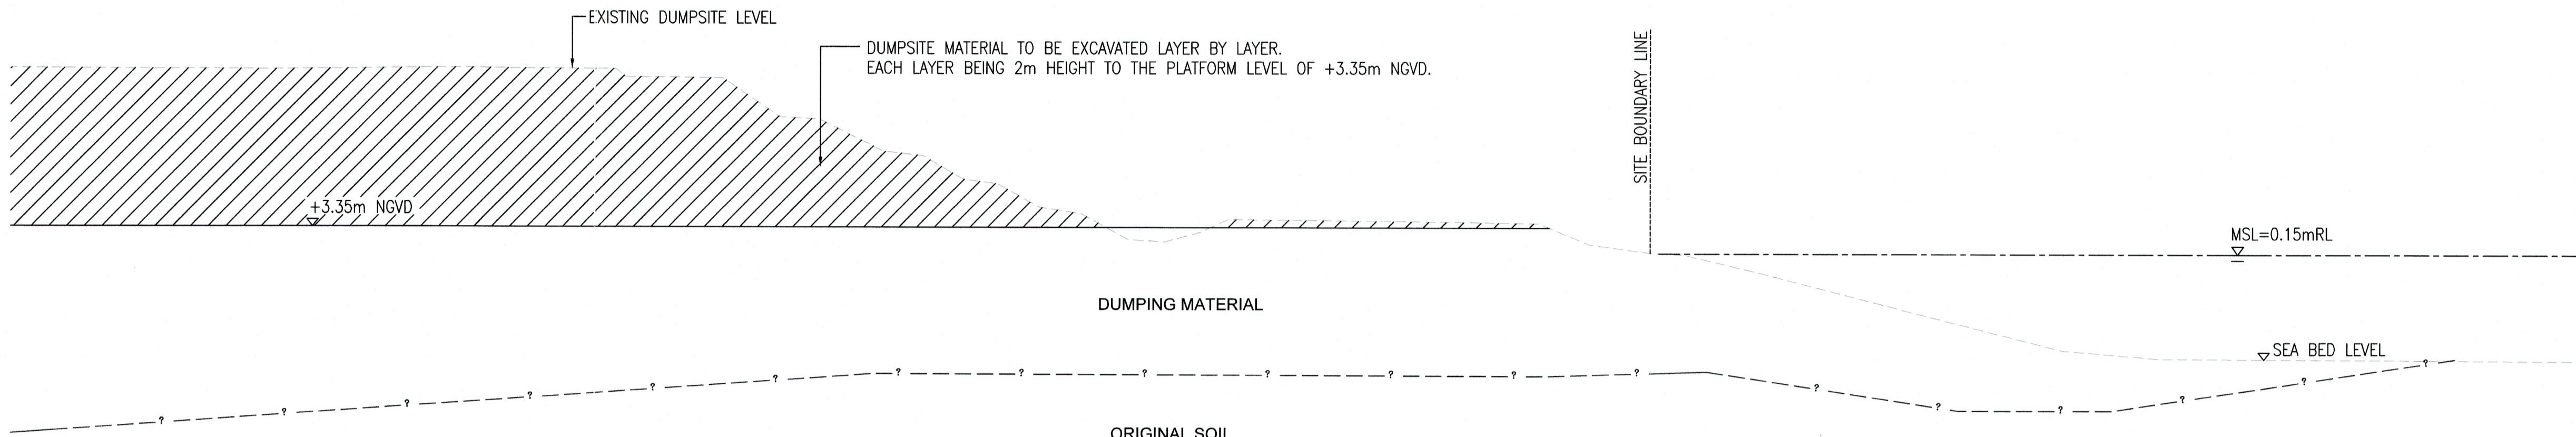


STAGE 2

- BACKFILL WITH SUITABLE MATERIAL TO FINAL PLATFORM LEVEL, +5.35m NGVD.
- THE EXISTING SHORELINE SHALL BE SCARIFIED AND REPROFILED TO SLOPE GRADIENT NOT STEEPER THAN 1V:4H AND TO BE VERIFIED VIA BATHYMETRIC SURVEY.

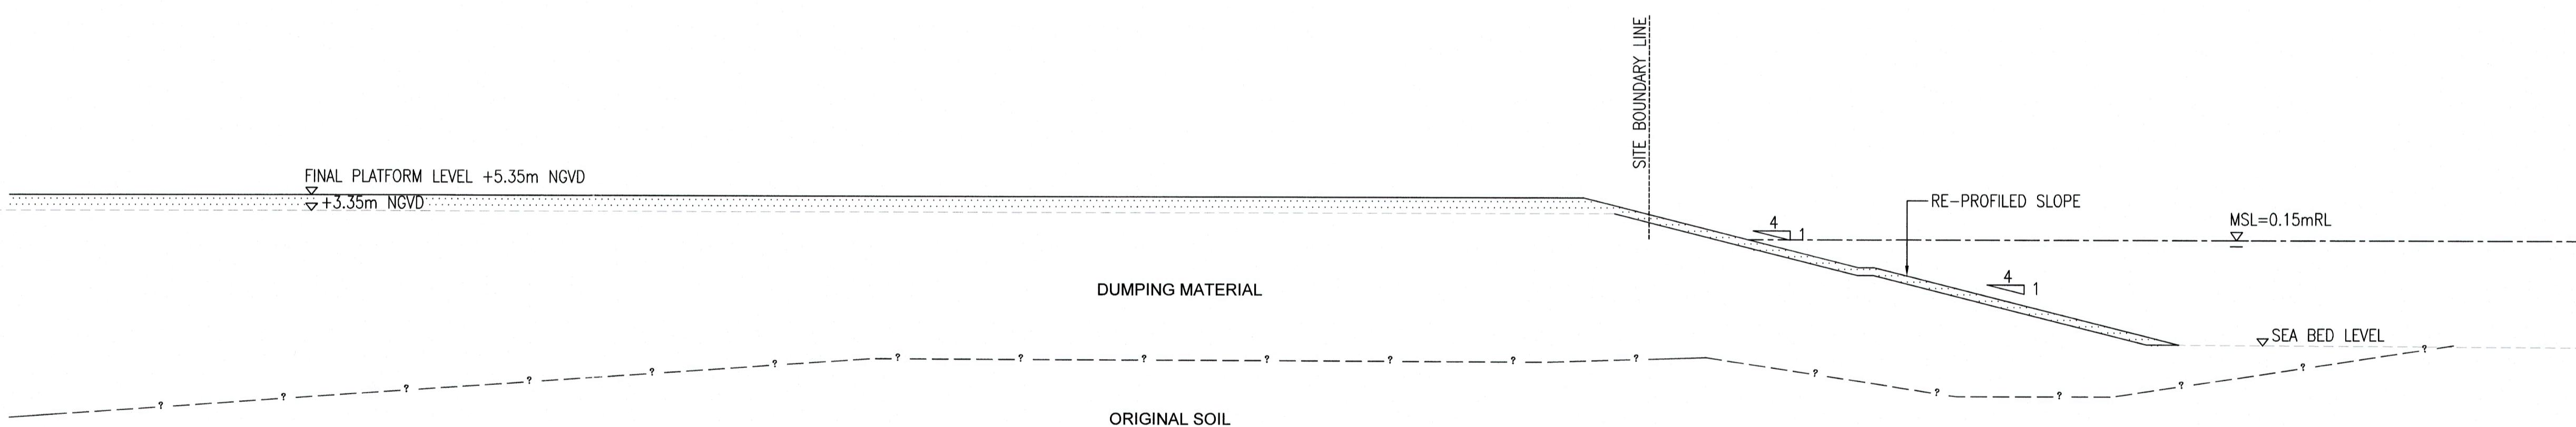

STAGE 3

- TO CONSTRUCT PERMANENT RIP-RAP REVETMENT WITH SLOPE GRADIENT NOT STEEPER THAN 1V:4H.
- CONTRACTOR IS RESPONSIBLE TO ENSURE STABILITY OF THE RECLAIMED LAND DURING EXCAVATION AND CONSTRUCTION OF PERMANENT RIP-RAP REVETMENT.

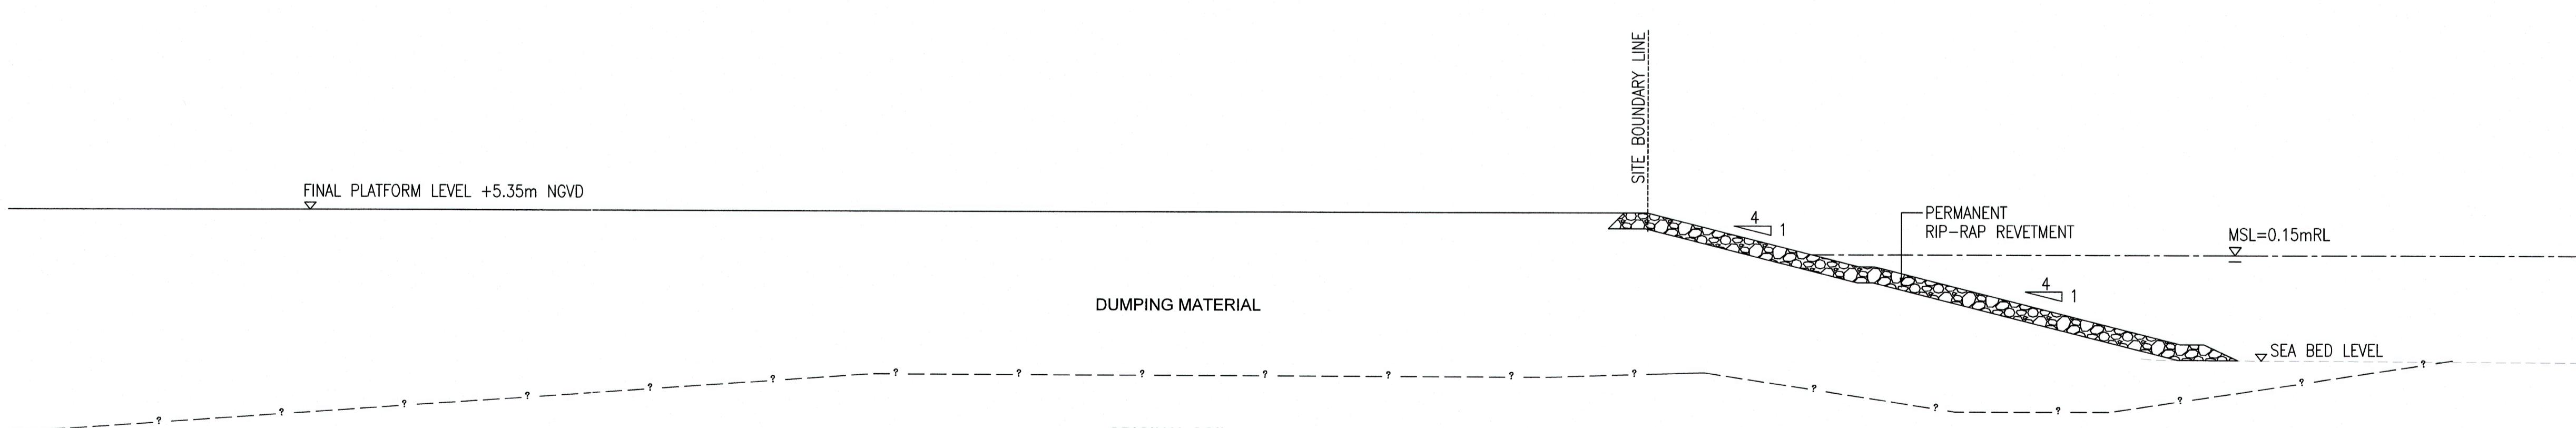

Tajuk Projek:

PERMOHONAN PELAN KERJA TANAH BAGI TUJUAN PEMBANGUNAN BERAMPUR DAN PERDAGANGAN DENGAN NISBAH PLOT 5/1, DI ATAS TANAH KERAJAN TEBUSUNA JELUTONG (TAPAK PELUPUSAN SAMPAH SEDIA ADA), SEKSYEN 8, BANDAR GEORGETOWN, PULAU PINANG UNTUK TETUAN PLB ENGINEERING BERHAD

Tandatangan Pemilik Tanah & Pemaju:

NAMA : DATO SIEW KOK YONG

PLB ENGINEERING BERHAD
Company No. : 199701002728 (418224-X)
1320, JALAN BARU, TAMAN CHAI LENG, 13700 PRAI, PENANG.

Arsitek :

W. K. Khor Architect Sdn Bhd

(TMMS8747)
L33, COLLEGE AVENUE
10230 GEORGETOWN, PENANG.
TEL: 03 2143 8068
FAX: 03 2143 8078

Jurutera Perunding


GLOBAL WATER CONSULTANTS SDN. BHD.
(200601017878)
23-4, JALAN TASIK SELATAN 3,
BANDAR TASIK SELATAN,
57100 KUALA LUMPUR, MALAYSIA.
TEL: 03-90595396 FAX: 03-90595869
E-MAIL: gwp@gwpgroup.com.my
WEB SITE: www.gwpgroup.com.my

Tandatangan Jurutera



NAMA : IR. LIM CHOO LIN

Tajuk Lukisan
EARTHWORK
CONSTRUCTION SEQUENCE (DUMPSITE)

Skala AS SHOWN	Tarikh APRIL 2024	Direka FAA	Dilukis LXH
Peringkat SUBMISSION	Kontrak	Disemak LCL	Dilulus LCL
No Projek 4440122	No. Lukisan 4440122/RC/SEQ/01		Pdn

FOR SUBMISSION ONLY