
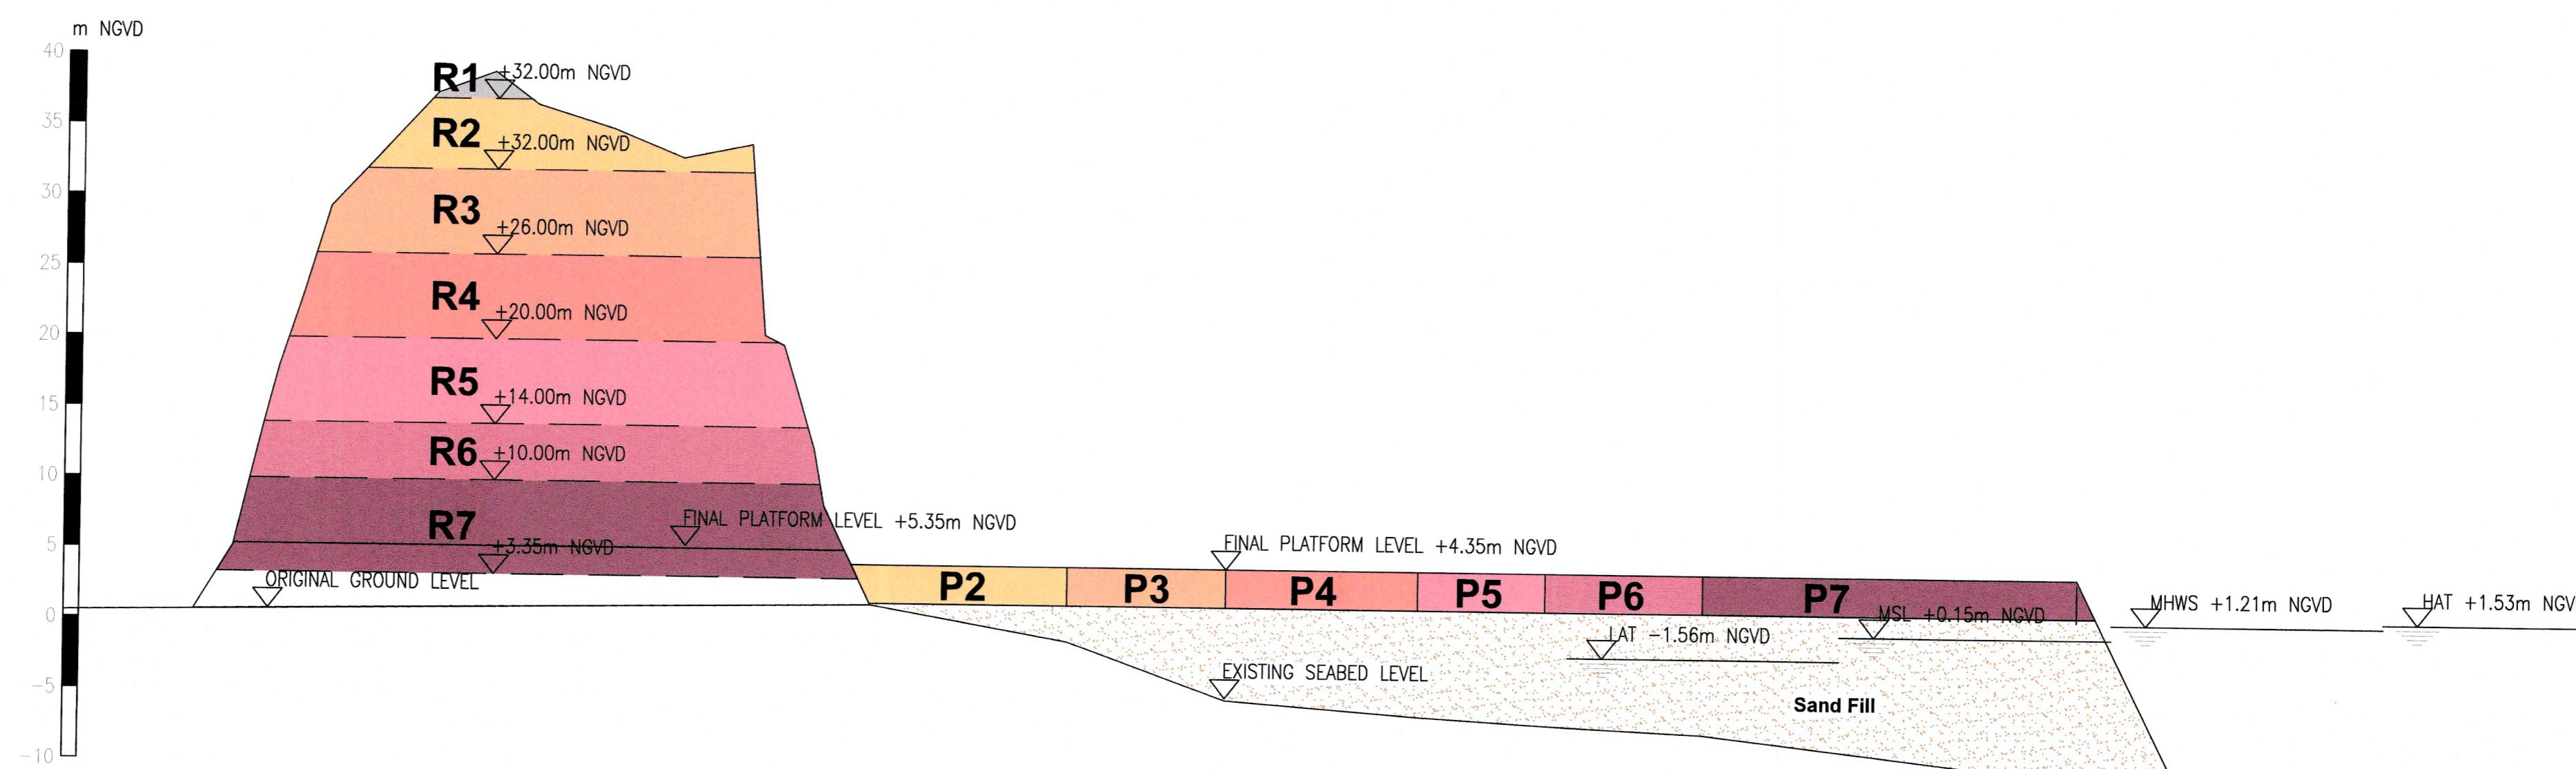


REHABILITASI				
ZON	KELUASAN KAWASAN TERLIBAT (m ²)	ISIPADU KERJA REHABILITASI (m ³)	KETINGGIAN MSL (m)	ISIPADU TERTINGGAL (m ³)
R1	-	T/B	37.00	7,380,000
R2	104,009m ²	355,765	32.00	7,024,235
R3	126,709m ²	662,400	26.00	6,361,835
R4	199,277m ²	953,400	20.00	5,408,435
R5	232,402m ²	1,275,600	14.00	4,132,835
R6	259,942m ²	1,011,600	10.00	3,121,235
R7	290,764m ²	1,967,063	3.35	1,154,172
REMAINING WASTE FROM +3.35 NGVD TO +0.00 NGVD	-	1,154,172		

TEBUS GUNA "WORKING PLATFORM"				
ZON	KELUASAN KAWASAN TERLIBAT (m ²)	65% BAHAN GUNABALIK (m ³)	MESIN UNTUK KERJA REHABILITASI (UNIT)	JANGKA MASA (HARI)
P1	-	T/B	2	120
P2	54,323m ²	418,287	4	600
P3	39,117m ²	301,201	4	210
P4	39,117m ²	301,201	4	160
P5	31,002m ²	238,715	4	120
P6	37,804m ²	291,091	4 (2 DARI P1)	120
P7	77,427m ²	596,188	T/B	150
REHABILITATION AREA	363,866m ²	1,200,758	T/B	160
	JUMLAH MESIN (UNIT)	20	1,640 HARI (4.5 TAHUN)	

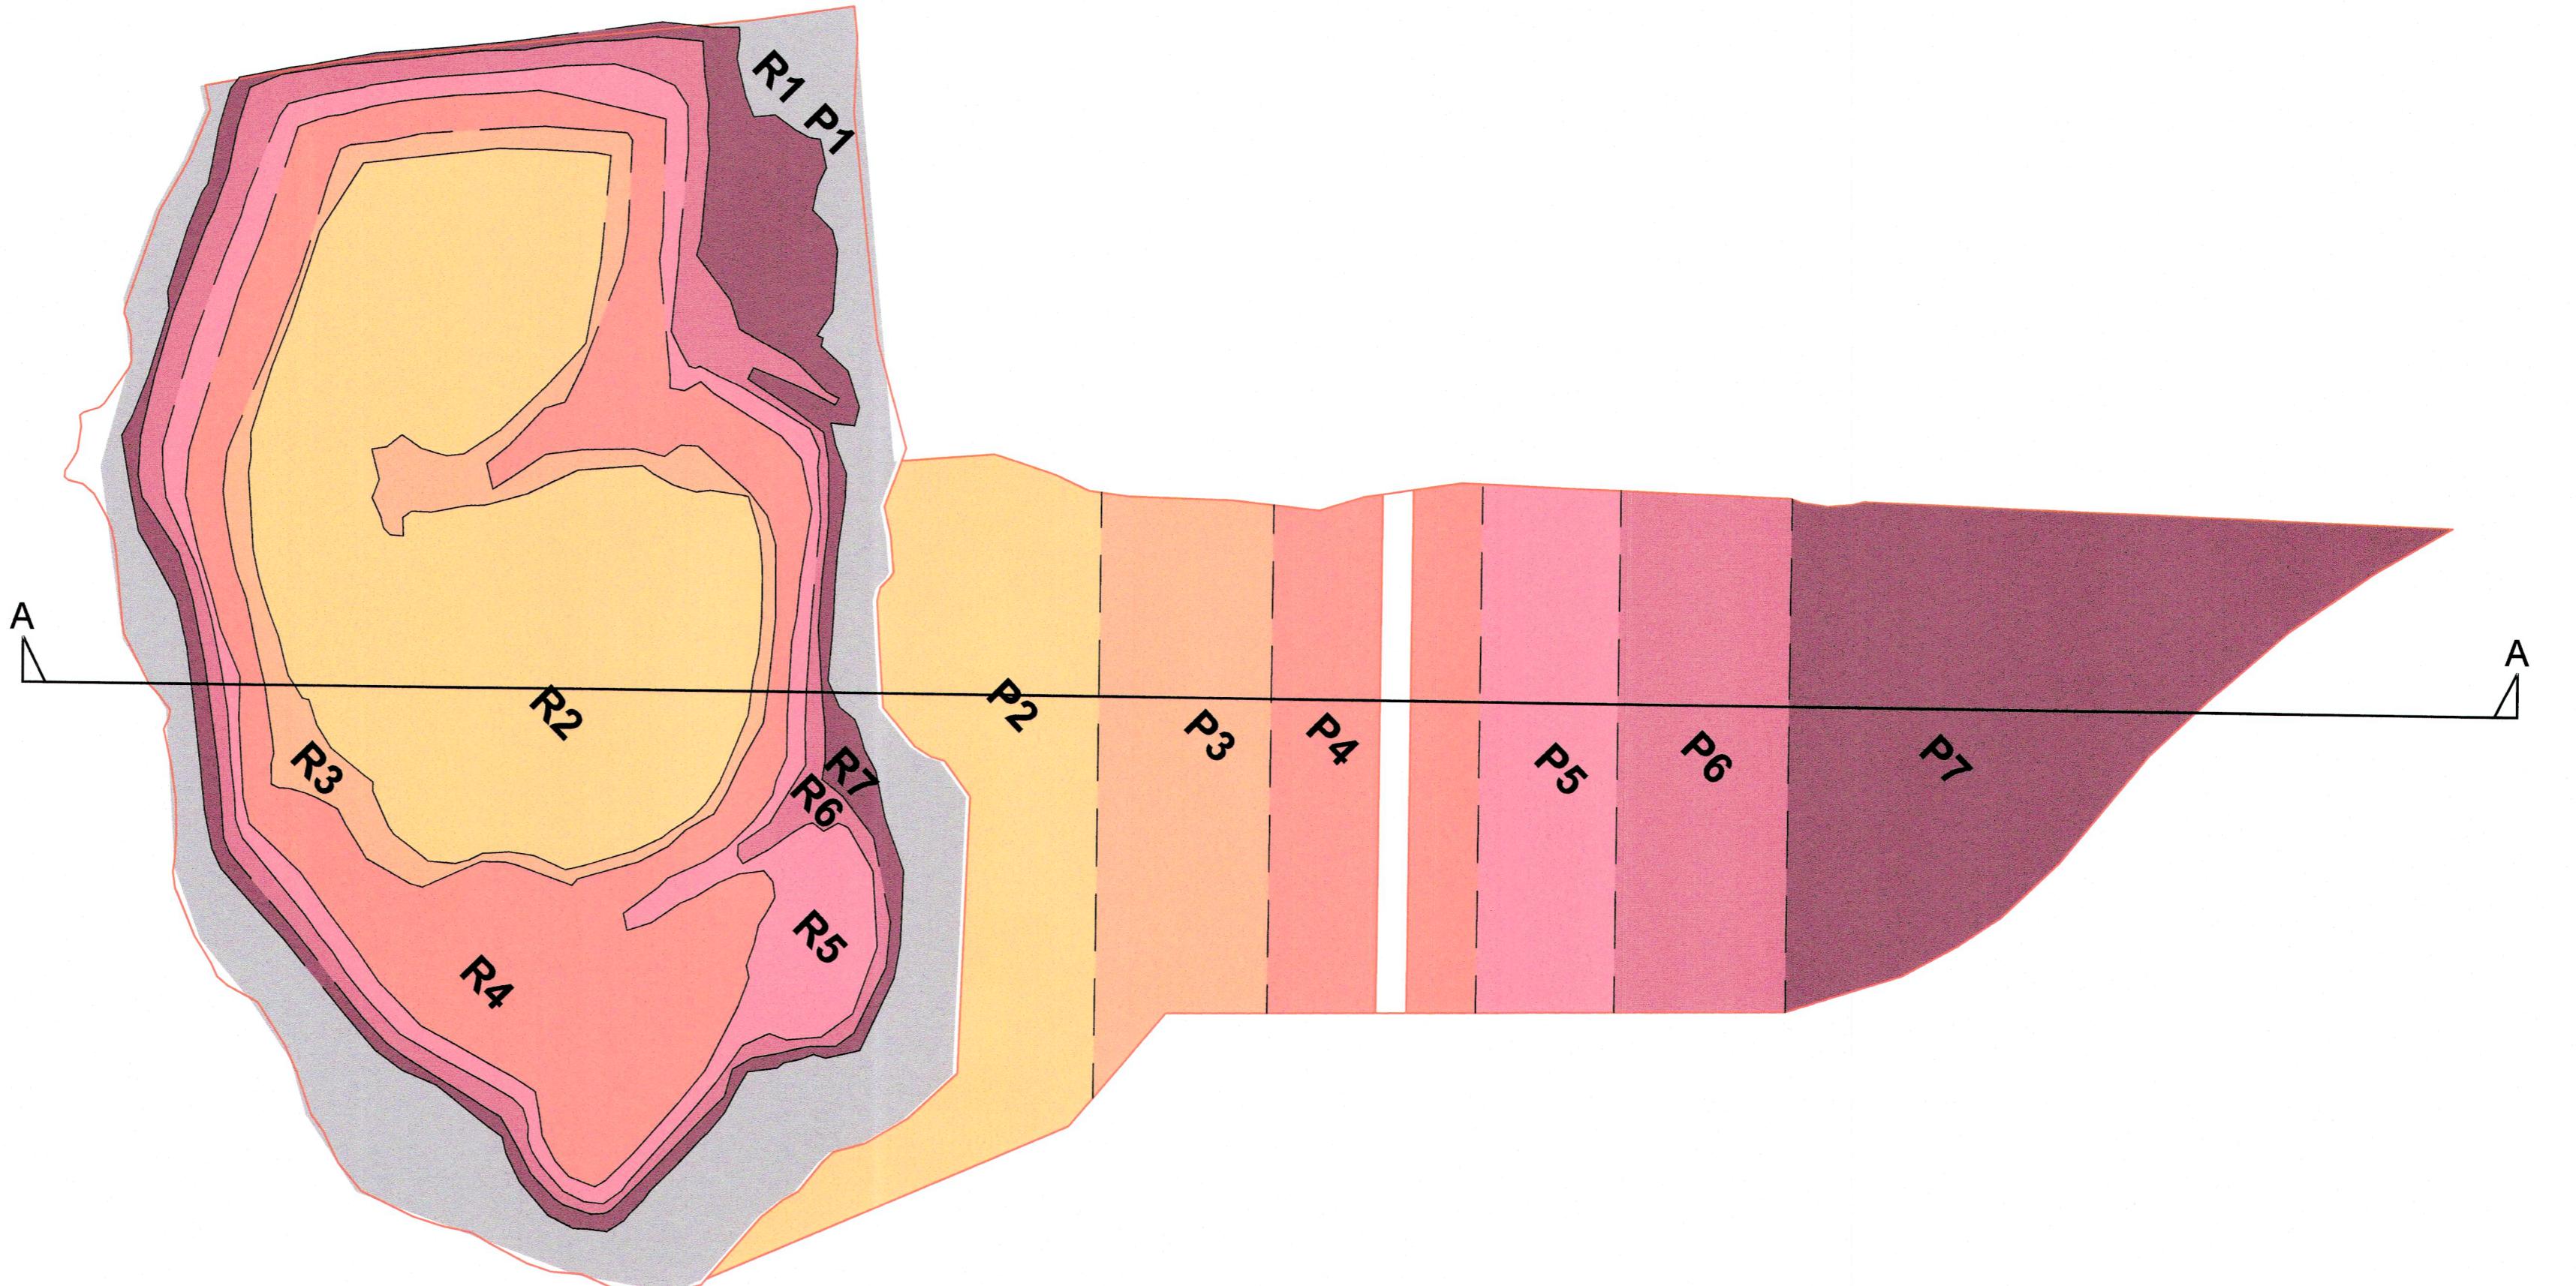

SECTION A-A
NTS

FOR SUBMISSION ONLY

No. Projek			
Keterangan Projek			
<p style="text-align: center;">N</p>			
<p style="text-align: center;">Tajuk Projek:</p> <p>PERMOHONAN PELAN KERJA TANAH DI BAWAH AKTA 133 UNTUK CADANGAN PEMBANGUNAN BERAMPUR DAN PERDAGANGAN DENGAN NISBAH PLOT 5.1, DI ATAS TANAH KERAJAAN TENTERA MALAYSIA (TAPAK PELUPUSAN SAMPAH SEDIADA), SEKSYEN 8, BANDAR JETI TONG, PULAU PINANG UNTUK TETUAN: PLB ENGINEERING BERHAD</p>			
<p style="text-align: center;">Tandatangan Pemilik Tanah & Pemaju :</p> <p>NAMA : DATO SIEW KOK YONG</p> <p>PLB ENGINEERING BERHAD Company No.: 199701002728 (418224-X) 1320, JALAN BARU, TAMAN CHAI LENO, 13700 PRAI, PENANG.</p>			
<p style="text-align: center;">Arsitek :</p> <p>W. K. Khor Architect Sdn Bhd (TMM38747) L33, COLLEGE AVENUE 10250 GEORGETOWN, PENANG. TEL: 03 2143 9268 FAX: 03 2143 9076</p>			
<p style="text-align: center;">Junctera Perunding</p> <p> GLOBAL WATER CONSULTANTS SDN. BHD. (200601017878) 23-4, JALAN TARIK SELATAN 3, 57000 ALAMERIA, LUMPUR, MALAYSIA TEL: 03-90595196; FAX: 03-90595669 E-MAIL: gwc@pggroup.com.my WEB SITE: www.gwcgroup.com.my</p>			
<p style="text-align: center;">Tandatangan Jurutera</p> <p> JURUTERA PROFESIONAL DENGAN PERAKUAN AMALAN Ir. LIM CHONN LIN C15534 MALAYSIA</p> <p>NAMA : IR. LIM CHONN LIN</p>			
<p style="text-align: center;">Tajuk Lukisan</p> <p>EARTHWORK DUMPSITE EXCAVATION STAGES CROSS SECTION</p>			
Skala	Tarikh	Direka	Dilukis
AS SHOWN	NOVEMBER 2022	LXH	LXH
Peringkat SUBMISSION	Kontrak	Dismak	Dilulus
No Projek	No. Lukisan	LCL	LCL
444GU22	444GU22/RCLRHBD01		Pdn